

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
7 March 2002 (07.03.2002)

(10) International Publication Number  
**WO 02/19661 A2**

PCT

(51) International Patent Classification<sup>7</sup>: H04L 29/06

(21) International Application Number: PCT/US01/41961

(22) International Filing Date: 30 August 2001 (30.08.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/653,045 1 September 2000 (01.09.2000) US

(71) Applicant: TOP LAYER NETWORKS, INC. [US/US];  
2400 Computer Drive, Westboro, MA 01581-1770 (US).

(72) Inventors: NARAYANASWAMY, Krishna; c/o Top  
Layer Networks, Inc., 2400 Computer Drive, Westboro,  
MA 01581-1770 (US). SPINNEY, Barry, A.; c/o Top  
Layer Networks, Inc., 2400 Computer Drive, Westboro,  
MA 01581-1770 (US). ROSS, Theodore, L.; c/o Top

Layer Networks, Inc., 2400 Computer Drive, Westboro,  
MA 01581-1770 (US). PAQUETTE, Michael, D.; Top  
Layer Networks, Inc., 2400 Computer Drive, Westboro,  
MA 01581-1770 (US). WRIGHT, Christopher, L.; Top  
Layer Networks, Inc., 2400 Computer Drive, Westboro,  
MA 01581-1770 (US).


(74) Agents: CHOW, Stephen, Y. et al.; Perkins, Smith & Co-  
hen, LLP, One Beacon Street, Boston, MA 02108 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI,  
SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA,  
ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian

[Continued on next page]

(54) Title: SYSTEM AND PROCESS FOR DEFENDING AGAINST DENIAL OF SERVICE ATTACKS ON NETWORK NODES

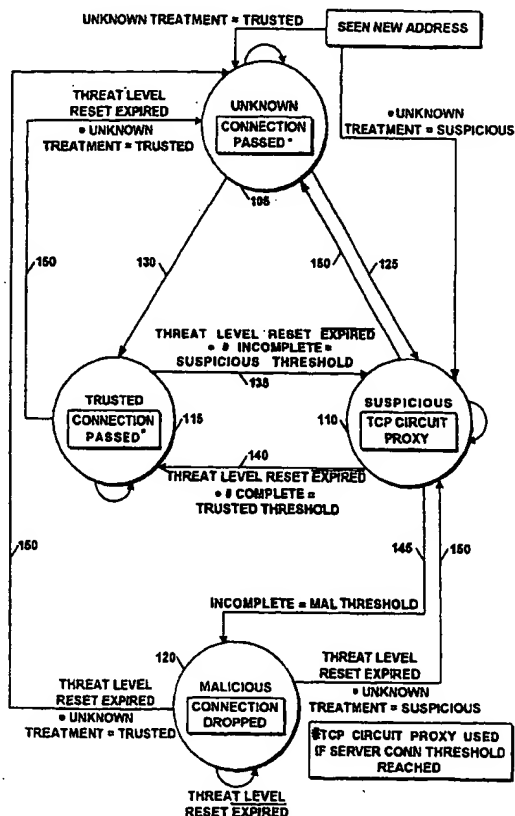

(57) Abstract: The present invention is a network switch that maintains a relatively lightly loaded state, and at the same time protects the network servers from DOS and DDOS attacks. The switch maintains a very large table of IP addresses where it stores information such as the number of incompleted and completed connections from each address. Using this information, the switch classifies each address into a threat level: unknown, trusted, suspicious, and malicious. Each threat level is treated differently allowing the switch to provide efficient access to the server while maintaining security. Connection to the server is denied to clients classified as malicious while trusted clients are passed through to the server. Suspicious connections are proxied while unknown connection treatment may be set by the user.

WO 02/19661 A2



patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- without international search report and to be republished upon receipt of that report

**SYSTEM AND PROCESS FOR DEFENDING AGAINST DENIAL OF SERVICE  
ATTACKS ON NETWORK NODES**

**FIELD OF THE INVENTION**

5        This invention relates generally to computer security and more particularly to preventing "denial of service" attacks through SYN flooding of a server connected to a computer network using the TCP/IP protocol.

10    **BACKGROUND OF THE INVENTION**

      Networks and the computers connected by networks have many vulnerabilities. One vulnerability is susceptibility to Denial of Service (DOS) attacks and Distributed Denial of Service (DDOS) attacks. These problems have recently brought  
15    down many prominent web sites and rendered them useless for many hours.

      A common type of DOS attack is called SYN flooding. Typically, a TCP-based application connection is set up by a 3-way handshake that is completed between a client and server.  
20    The client asks for a connection to the server by sending a SYN (synchronization) message to the server. In response, the server allocates resources and responds to the client with a SYN-ACK (synchronization acknowledgment) message. The client, upon receiving the SYN-ACK, replies to the server with an ACK,  
25    and the connection then enters the ESTABLISHED state.

      If the 3-way handshake does not complete normally, the server generally holds on to the state for as long as 2 minutes before releasing the connection and the allocated resources. The DOS and DDOS attacks involve rogue client  
30    machines initiating multiple connections that do not respond to the SYN-ACK sent by the server. The server soon runs out of resources and cannot set up new connections from legitimate clients. Under certain circumstances, the servers must be rebooted before they can return to normal behavior. If the  
35    attack persists, the server could be taken out of service for a long time.

      Another type of DOS attack involves repeated complete TCP connections. For example, repeated HTTP GET requests from an

Internet client to a server. While the HTTP GET command is small, the amount of data requested from the server can be large. With each HTTP GET command potentially using up a significant percentage of the server resources, the server can  
5 be potentially overwhelmed. A large number of HTTP GET requests could overwhelm a server even without requesting large amounts of data. Further examples of potential attacks are FTP GET messages and SMTP (e-mail) SEND commands.

There are other solutions in the current art that attempt  
10 to solve the DOS and DDOS attack problems. The most popular solutions involve a third device (usually a switch or router) acting on behalf of the server, known as a "proxy," until the 3-way handshake completes successfully. The proxy then connects to the server. This is a resource-intensive process.  
15 Current art proxy devices have difficulty handling even a reasonable network load. It remains desirable to protect network servers without sacrificing server availability.

It is an object of the present invention to provide a method and apparatus to reduce vulnerability of networked  
20 servers to DOS and DDOS attacks.

#### SUMMARY OF THE INVENTION

The problems of Denial of Service and Distributed Denial of Service attacks in a computer network are solved by the  
25 present invention of a SYN flood mitigation system and process.

The present invention is a network switch that maintains a relatively lightly loaded state, and at the same time, protects the network servers from DOS and DDOS attacks. The  
30 switch maintains a very large table of IP Addresses (for example ~200K,, however larger tables are possible within the scope of the present invention) where it stores information such as the number of incomplete/completed connections from each address. Using this information, the switch classifies  
35 each address into a threat level: unknown, trusted, suspicious and malicious. Each threat level is treated differently allowing the switch to provide efficient access to the server while maintaining security. Connection to the server is

denied to clients classified as malicious, while trusted clients are passed through to the server. Suspicious connections are proxied, while unknown connection treatment may be set by the user.

5 By continuously keeping track of how many connection attempts are made by each client and how many of those are completed successfully, the switch transitions a client's IP address into one of the above mentioned Threat Levels and treats the attempted connection to the server accordingly.

10 The present invention together with the above and other advantages may best be understood from the following detailed description of the embodiments of the invention illustrated in the drawings, wherein:

#### 15 BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram of a web site having a switch according to principles of the invention connected to the Internet;

20 Figure 2 is a schematic diagram of communications between a client and a server through the switch of Figure 1;

Figure 3 is a state diagram of the switch of Figure 1;

Figure 4 is a first flow chart of the operation of the switch of Figure 1;

25 Figure 5 is a second flow chart of the operation of the switch of Figure 1 when a request for connection from a trusted IP address is received;

Figure 6 is a third flow chart of the operation of the switch of Figure 1 when a request for connection from a suspicious IP address is received; and

30 Figure 7 is a fourth flow chart of the operation of the switch of Figure 1 when a request for connection from an unknown address is received.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

35 Figure 1 is a block diagram of the switch according to principles of the present invention. A web site 10 connected to the Internet 15 has a router 20 connected to a switch 25 operating according to the present invention. The switch 25

has a plurality of servers 30 and a database 100 connected to it. A plurality of clients 35 connected to the Internet 15 may access the servers 30 on the Web site 10 through the switch 25. The servers may be accessed over the Internet  
5 using the TCP/IP protocol.

Figure 2 is a schematic diagram of establishing a proxied connection through the switch 25 of the present invention from a client 50 to a server 55.

Figure 2a shows an incomplete connection from the client  
10 50 to the server 55. In attempting to establish a connection to the server 55, the client 50 sends a SYN message 60 which is received by the switch 25. The switch 25 allocates resources for a connection and sends a SYN-ACK message 65 to the client 50. The switch 25 then waits for a period of time  
15 for an ACK message from the client 50. The period of time may be, for example, 15 seconds, but it may be longer or shorter within the scope of the present invention. If, after the waiting period, the switch 25 does not receive an ACK message from the client 50, the switch releases the resources.

Figure 2b shows a completed proxied connection from the  
20 client 50 to the server 55 through the switch 25. The client 50 sends a SYN message 60. The switch 25 allocates resources and responds with a SYN-ACK message 65. The client 50 replies to the SYN-ACK message 65 with an ACK message 70 to complete a  
25 connection to the switch. When the ACK message 70 is received from the client, the switch sends a SYN message 75 to the server 55. The server 55 responds by allocating resources and sends a SYN-ACK message 80 to the switch 25. The switch responds with an ACK message 85 to complete the connection to  
30 the server 55 and the proxy connection to the client 50.

Figure 2c shows the switch 25 providing a data connection between the client 50 and the server 55. The switch 25 provides splices 90, 95 to match the client data sequence number with the server data sequence number.

Figure 3 shows a state diagram of the switch of the  
35 present invention. The switch classifies a client attempting to connect to a server as one of four types: unknown 105, suspicious 110, trusted 115 or malicious 120. When the client

attempts to connect to the server, a client identifier and the connection attempt are noted as described below. In the present invention, the client identifier is the IP address of the client. The identifier of the client and the associated client type are stored in a large database 100 (Figure 1) which the switch consults whenever a client requests a connection to a server connected to the switch. The database may be in the switch itself or it may be remote from the switch. The server may be directly or indirectly connected to the switch. Two counts are kept for each IP address in the database, a completed connections count and an incomplete connections count. The switch maintains a threshold value called the trusted threshold, which is associated with the completed connections count. The switch has two additional thresholds, the suspicious threshold and the malicious threshold, which are associated with the incomplete connections count.

A detailed description of the classification is as follows.

- 1) *Unknown* 105 - If a client is connecting for the first time, or after a sufficient length of time has passed since the client's previous connection, the client is classified as unknown. The switch may be set to treat an unknown client as either suspicious or trusted.
- 2) *Suspicious* 110 - If the number of incomplete connection setups from a particular client exceeds the suspicious threshold, the client is classified as suspicious.
- 3) *Trusted* 115 - If the number of successfully completed connections from a particular client is greater than a trusted threshold, the client is classified as trusted.
- 4) *Malicious* 120 - If the number of incomplete connection setups from a particular client exceeds the malicious threshold, then the client is classified as malicious.

Any client IP address that is classified as trusted is considered good and its connection request is sent to the server as normal. The user of the switch may also set the switch so that client IP addresses that are unknown may be treated as trusted.

Any connection request from a client IP address that is in the Suspicious state is always proxied by the switch. The server is contacted only upon successful completion of a connection between the client and the switch.

- 5 Any connection request from a client IP address that is in the malicious state is discarded.

The state transitions are as follows:

- Unknown ---> Suspicious 125** A client is reclassified as suspicious from the unknown state when the number of incomplete connection requests is greater than or equal to the suspicious threshold of the server connect threshold.

**Unknown ---> Trusted 130** A client is reclassified as trusted from the unknown state when the number of completed connection requests is greater than or equal to the trusted threshold.

- 15 **Trusted ---> Suspicious 135** A client is reclassified as suspicious from a trusted state when the number of incomplete connection requests is greater than or equal to the suspicious threshold.

- 20 **Suspicious ---> Trusted 140** A client is reclassified as suspicious from the trusted state when the number of completed connection requests is greater than or equal to the trusted threshold.

- 25 **Suspicious ---> Malicious 145** A client is reclassified as malicious from the suspicious state when the number of incomplete connection requests is greater than or equal to the malicious threshold.

- 30 The initial state assigned to an address is based on the unknown treatment parameter set by the user. If it is set to suspicious, the initial state of an unknown client is suspicious and the first connection request is proxied. Otherwise the initial state is left classified as unknown which is treated in a manner similar to the trusted state.

- 35 In any one of these states, if there are no new connection requests for a period of time set in a ThreatLevelReset Time value, the address is returned to an initial state of unknown 150, except in the case where the transition is from the malicious state and the initial value for unknown clients is suspicious.



Figure 4 is a first flow chart of the operation of the switch of the present invention. When a client requests a connection to a server connected to the switch, the switch receives a SYN message from the client which includes the client's IP address, block 200. The switch checks the table of IP addresses and associated types, block 205. If the client IP address is not found in the table, then the client is unknown. The IP address is added to the table and the switch treatment parameter is set, block 210. If the client IP address is found in the table, the switch then checks the table for the last time the client requested a connection, block 215. If the period of time since the last connection request exceeds the time limit, then the treatment parameter for the client is reset to unknown, block 215.

Then the switch increments an incomplete connections counter associated with the IP address, block 220. The switch then reads the treatment parameter for the client from the table, block 225, and then moves to that state. If the client is of type malicious, the packet from the client is dropped and no connection is established, block 230.

If the client is trusted, the client is handled according to Method A 235 shown Figure 5. If the client is suspicious, the client is handled according to Method B 240 as shown in Figure 6. If the client is unknown, the client is handled according to Method C 245 in Figure 7.

Referring now to Figure 5, when the client is a trusted client, the switch determines if the number of incomplete connections is greater than the suspicious threshold 250. If the suspicious threshold is exceeded, the client's status is changed to suspicious 255. The switch resets the completed connections counter for the client. The switch then establishes a proxy connection between the server and the client 260.

If the suspicious threshold has not been exceeded, the client remains classified as a trusted client. A trusted client requires no proxy and the connection is passed to the server, block 265. The switch then determines whether the connection between the client and the server was completed,

block 270. If the connection is completed, the completed connections counter is incremented and the incompleted connections counter is decremented, block 275. If the connection is not completed, the counters are not changed

5 block 280.

Referring now to Figure 6, when a client is a suspicious client, the switch first determines whether the number of incomplete connections is equal to the malicious threshold, block 300. If it is, the packet is dropped and the connection is not completed, block 305. If the incomplete connections count is not equal to the malicious threshold, the switch determines whether the number of completed connections is greater than the trusted threshold, block 310. If the trusted threshold has been exceeded, the switch passes the connection through to the server, block 315. If the trusted threshold has not been exceeded, the switch acts as a proxy device between the client and the server, block 320.

Referring now to Figure 7, when a client is an unknown client, the switch first determines whether the incomplete connections counter exceeds the suspicious threshold, block 350. If the suspicious threshold is exceeded, the treatment parameter of the client is changed to suspicious and the switch forms a proxy connection between the client and the server, block 355. If the suspicious threshold has not been exceeded, the switch then determines whether the completed connections counter is greater than the trusted threshold, block 360. If the trusted threshold is exceeded, the client is classified as a trusted client and the connection is forwarded to the server, block 365. If the trusted threshold has not been exceeded, then the client remains in the unknown state and the connection is forwarded to the server, block 370.

The switch also maintains a count of valid connections per source IP address for types of requests which may be used to attack the server. The count is kept per unit time. If a client address exceeds a threshold number of valid connections of a specified type, connection attempts beyond the threshold

number are discarded. Examples of requests are HTTP GET requests, and FTP GET requests.

There is an alternate form of SYN flood attack where there are a large number of clients, i.e. a large number of  
5 addresses, each request a connection to a server. In this type of attack, the individual addresses themselves may not exceed the suspicious or malicious thresholds, and so may not be proxied or barred from connection. The server, however, could receive a higher number of connections than it can  
10 handle. In order to protect the server from this type of attack, the switch maintains a counter of incomplete TCP connections to each server. If this number exceeds a threshold called the ServerCon threshold, the requested connection is always proxied except where the address is  
15 already classified as malicious, in which case the connection request is dropped.

Every time a new connection is attempted through the switch, the switch sends a session report to a data collector. The data collector may be close to the switch or remotely  
20 located. The report indicates the threat level that was associated with the client IP address for the attempted connection. The data may be stored for purposes such as generating system messages to users monitoring the system. The data may also be extracted for analysis or into a  
25 graphical monitoring system.

In a first alternative embodiment of the invention, instantaneous thresholds may be set. The instantaneous thresholds are set to large enough values so that ACKs that are lost to due lost packets do not trigger a change in switch  
30 state possibly resulting in denial of a client. The instantaneous threshold values are also set small enough so that genuine attacks are not allowed to create a DOS condition.

In a second alternative embodiment of the invention,  
35 thresholds are randomly varied so that network scanning tools have greater difficulty in determining if a particular switch or server is in a network.

In a third alternative embodiment of the invention, a percentage of connects from "known threat" addresses may be proxied in order to confuse network scanning tools. The percentage may be based on attack load or normal load. If the switch is under heavy attack, for example, the "known threat" addresses are all, or almost all, discarded. If the switch is under light attack, then some connections from the "known threat" addresses are proxied. This provides a confused view of the network to network scanning tools and further tends to provide a different set of "available" ports at different times, i.e. at repeated attacks.

In a fourth alternative embodiment of the invention, the malicious threshold is a ratio of the number of failed connections to the number of requests greater than a selected initialization threshold. This method, however, may enable a sophisticated threat involving mixing good requests with malicious requests resulting in a DOS failure of the server because the threat level of the source IP address was not raised to the malicious level.

It is to be understood that the above-described embodiments are simply illustrative of the principles of the invention. Various and other modifications and changes may be made by those skilled in the art which will embody the principles of the invention and fall within the spirit and scope thereof.

What is claimed is:

1. In a communication network in which connections are established in part by a reservation of node resources during connection set-up, a process for defending against malicious reservation of said resources causing denial of service, said  
5 process comprising:
  - a) tracking for a predetermined time period the number of requests of reservation of said node resources from a particular source;
  - 10 b) determining the number of said requests from said source failing to result in a completed connection;
  - c) if said number of failures exceed a threshold of presumed maliciousness, then rejecting further requests from said source for a predetermined time-out-period.
- 15 2. The process of Claim 1 further comprising the step of:
  - b') if said number of failures exceed a threshold of suspicion, then sending through a proxy further requests from said source for a predetermined watch period.
3. The process of Claim 1 wherein said threshold is a ratio  
20 of said number of failures to said number of requests greater than a predetermined initialization threshold.
4. The process of Claim 1 further comprising the step of:
  - d) if the number of requests from said source failing to result in a completed connection does not exceed a  
25 threshold of suspicion and the number of requests from said source resulting in a completed connection does not exceed a threshold of presumed trustworthiness, then sending through a proxy further requests from said source for a predetermined watch period.
- 30 5. The process of Claim 4 further comprising the step of:
  - e) if the number of requests from said source resulting in a completed connection exceeds a threshold of presumed trustworthiness, then connecting said source to said server.
- 35 6. An apparatus for mitigating attacks on a server connected to a large network, comprising:
  - a database for storing a plurality of client identifiers and associated client data; and

a switch to receive as input over the network an identifier of a client requesting a connection to the server, said switch to match said received identifier with a client identifier stored in said database and to operate on said  
5 requested connection according to client data associated with a matched identifier.

7. The apparatus of claim 6 wherein said switch operates according to a user-set parameter when no match for said received identifier is found in said database.

10 8. The apparatus of claim 6 wherein associated client data further comprises a threat level.

9. The apparatus of claim 6 further comprising a state machine to determine a threat level of a client requesting connection from said received client identifier and associated client  
15 data stored in said database.

10. The apparatus of claim 6 wherein said associated client data further comprises a count of completed connections between the client and the server and a count of incomplete connections from the client to the server.


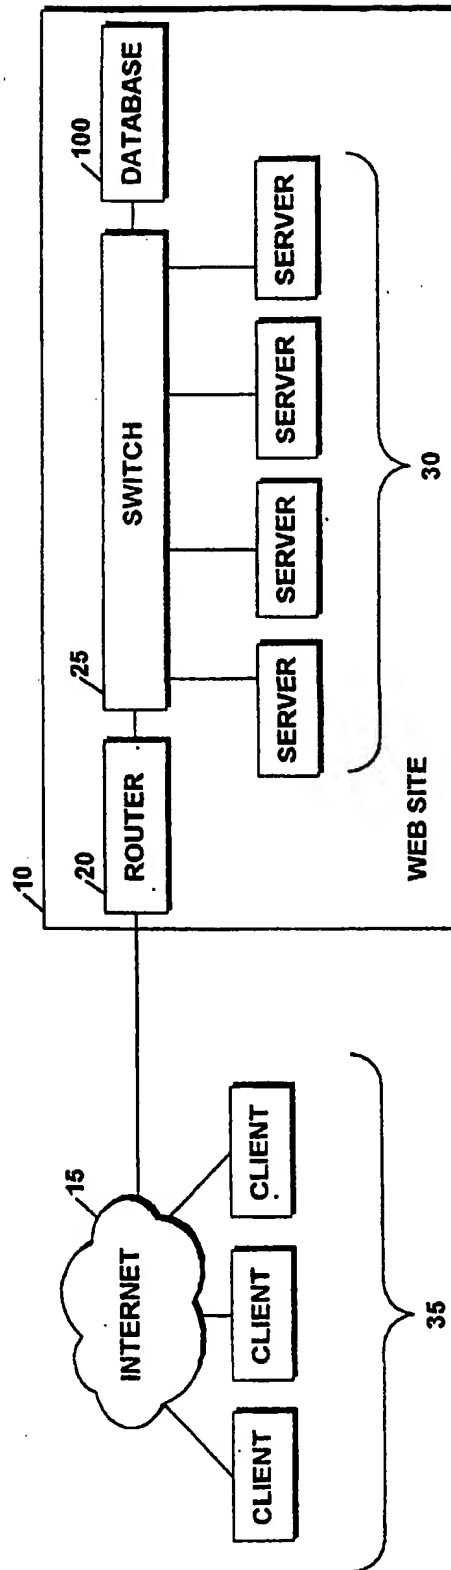


Figure 1

Figure 2



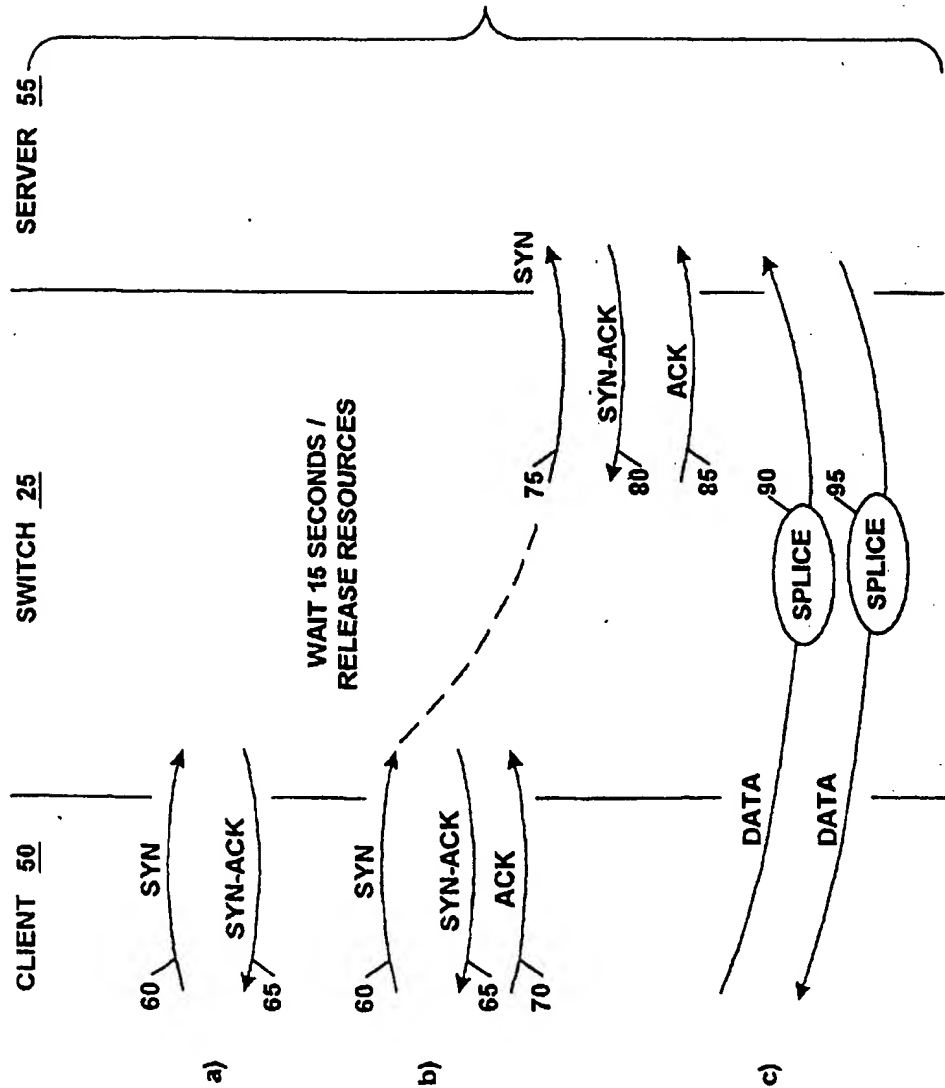

3/7

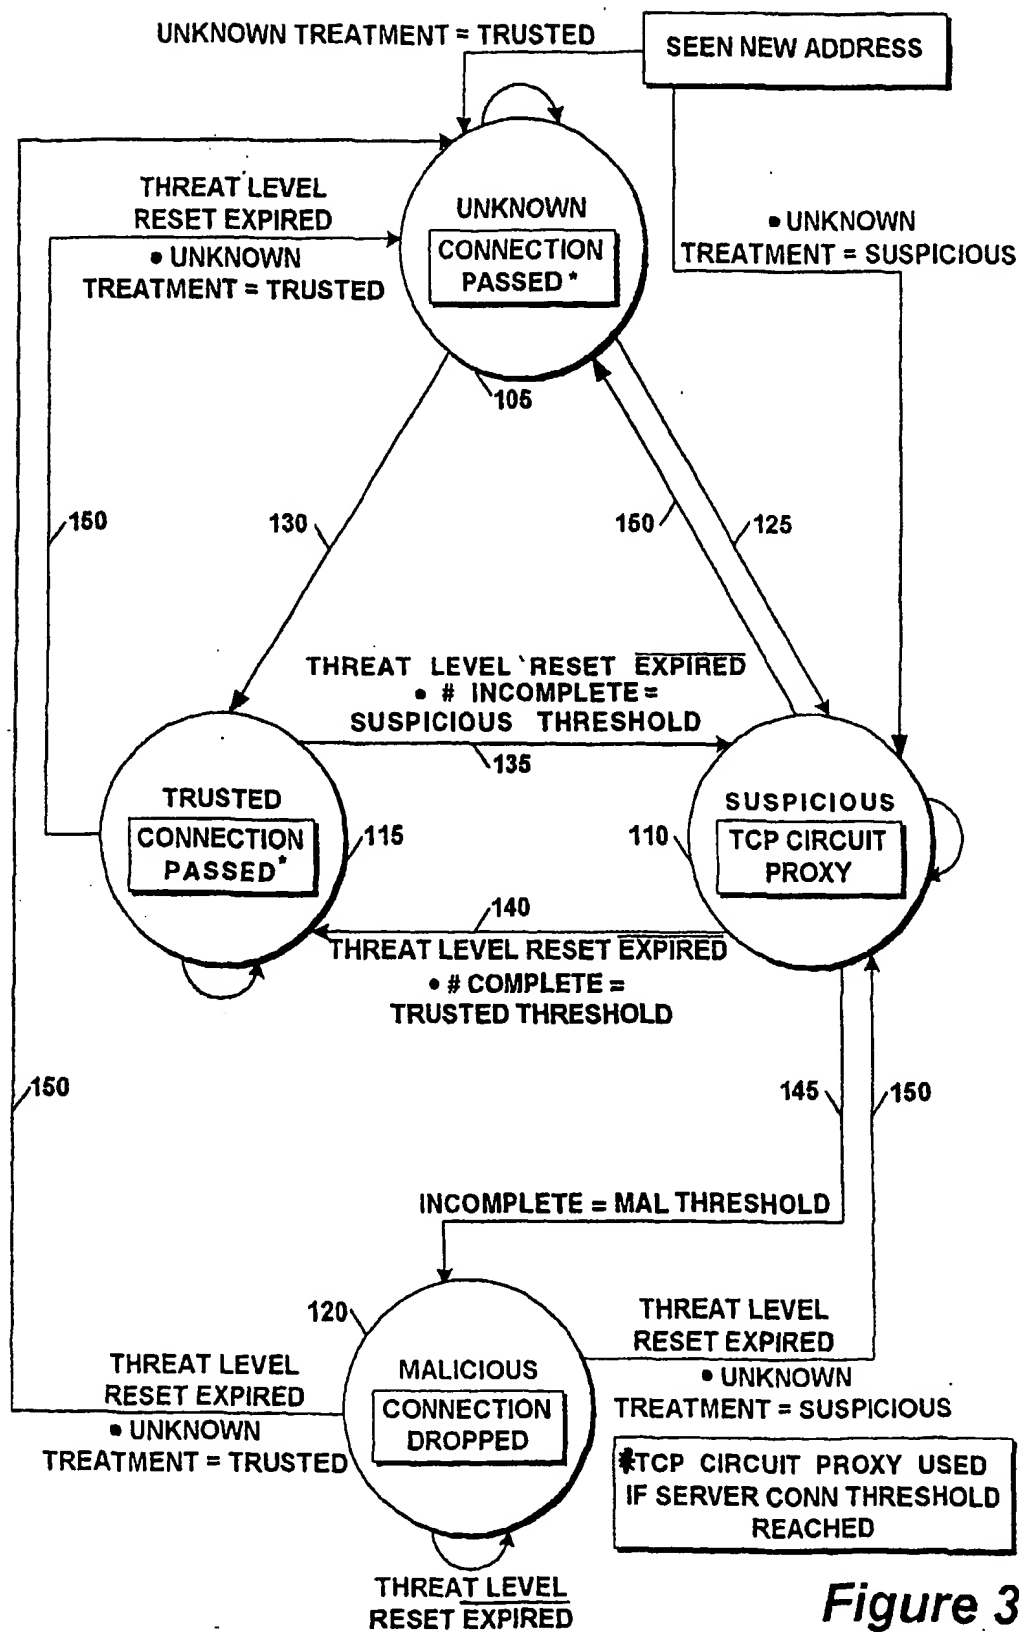


Figure 3

4/7

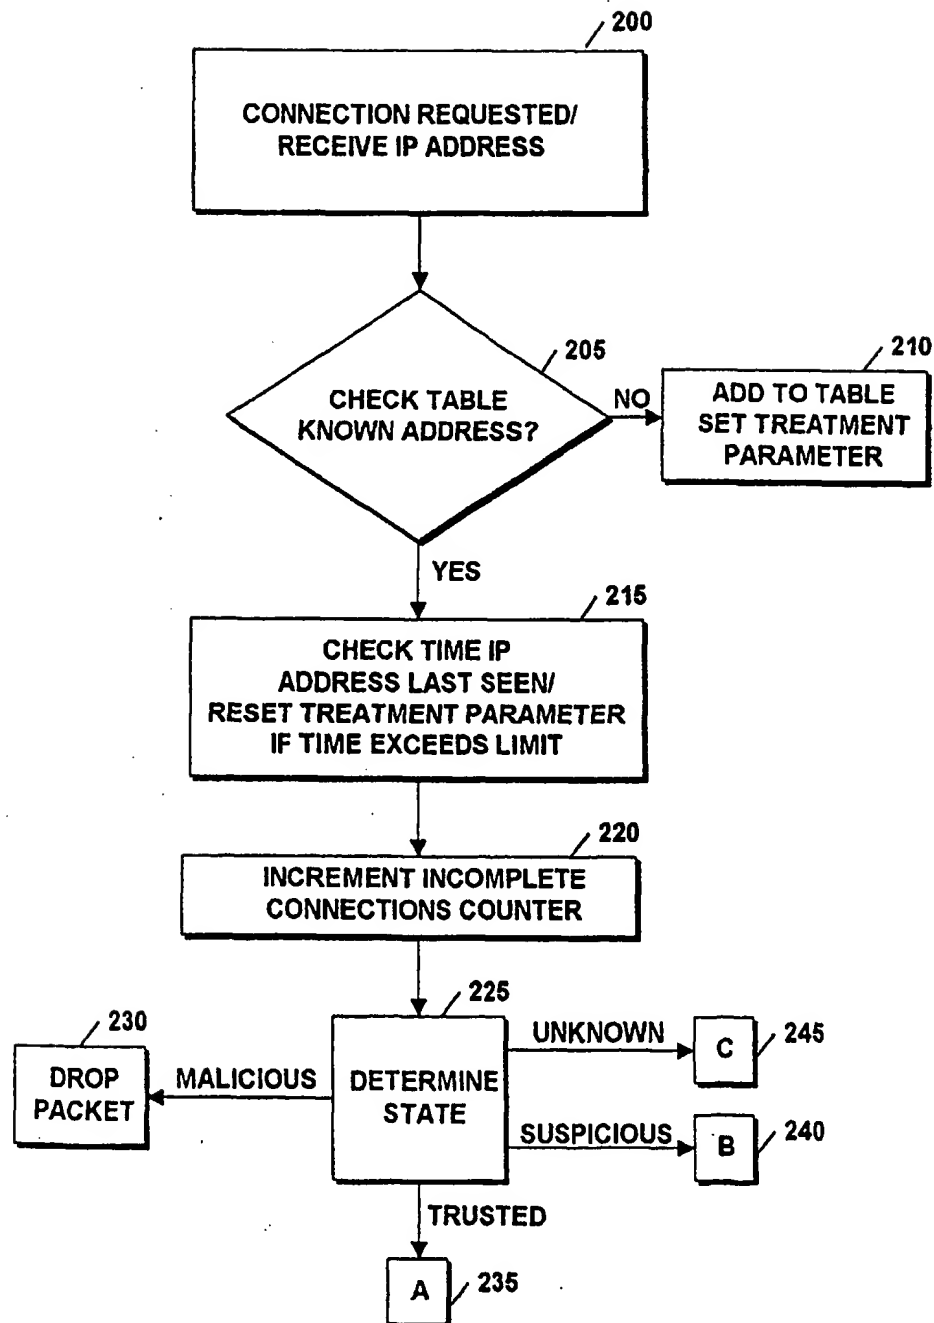


Figure 4

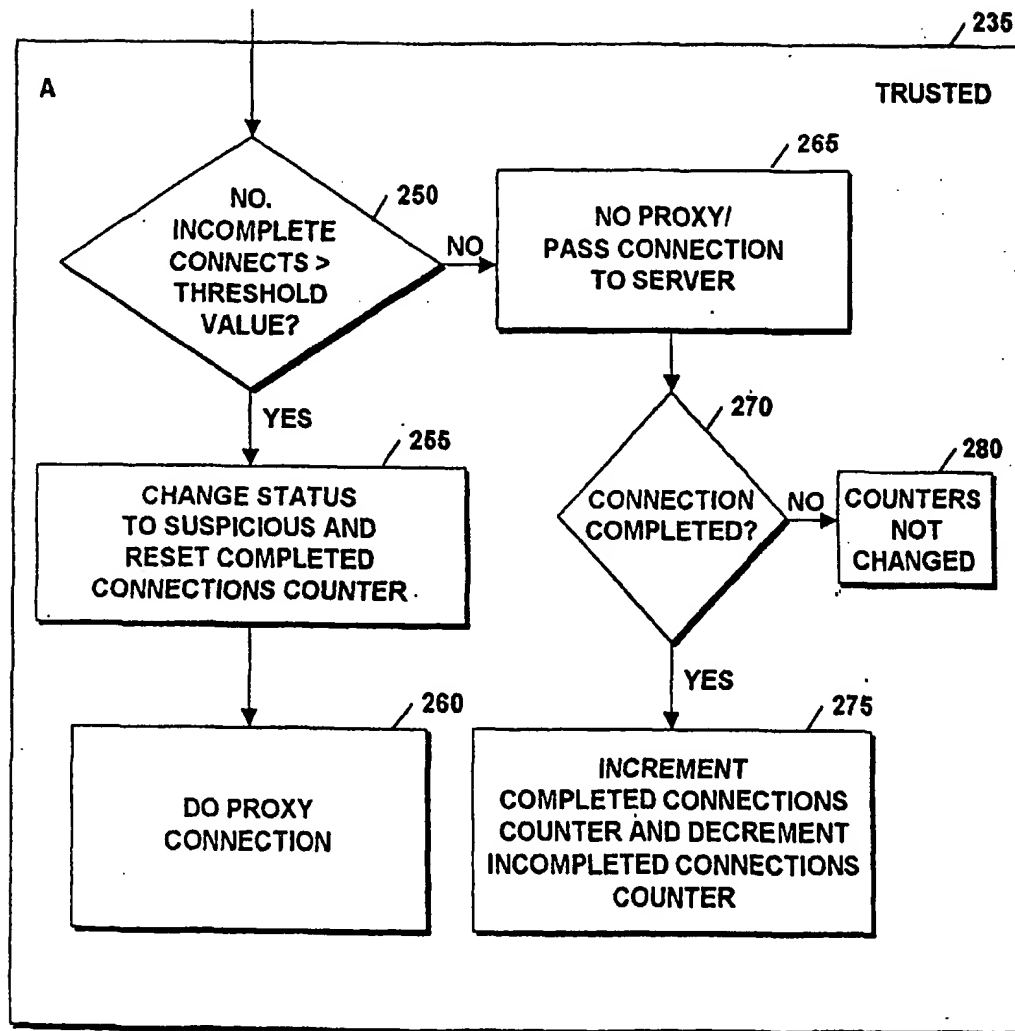


Figure 5

6/7

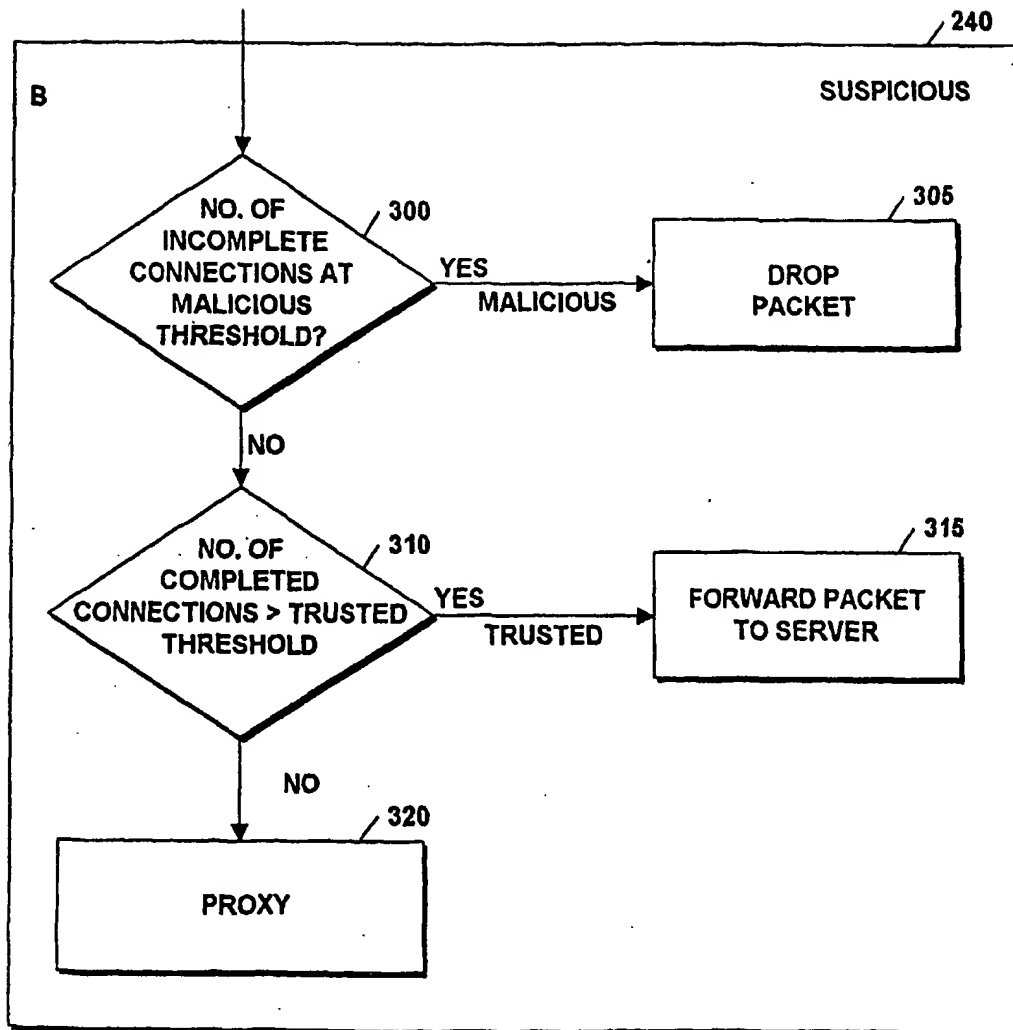


Figure 6

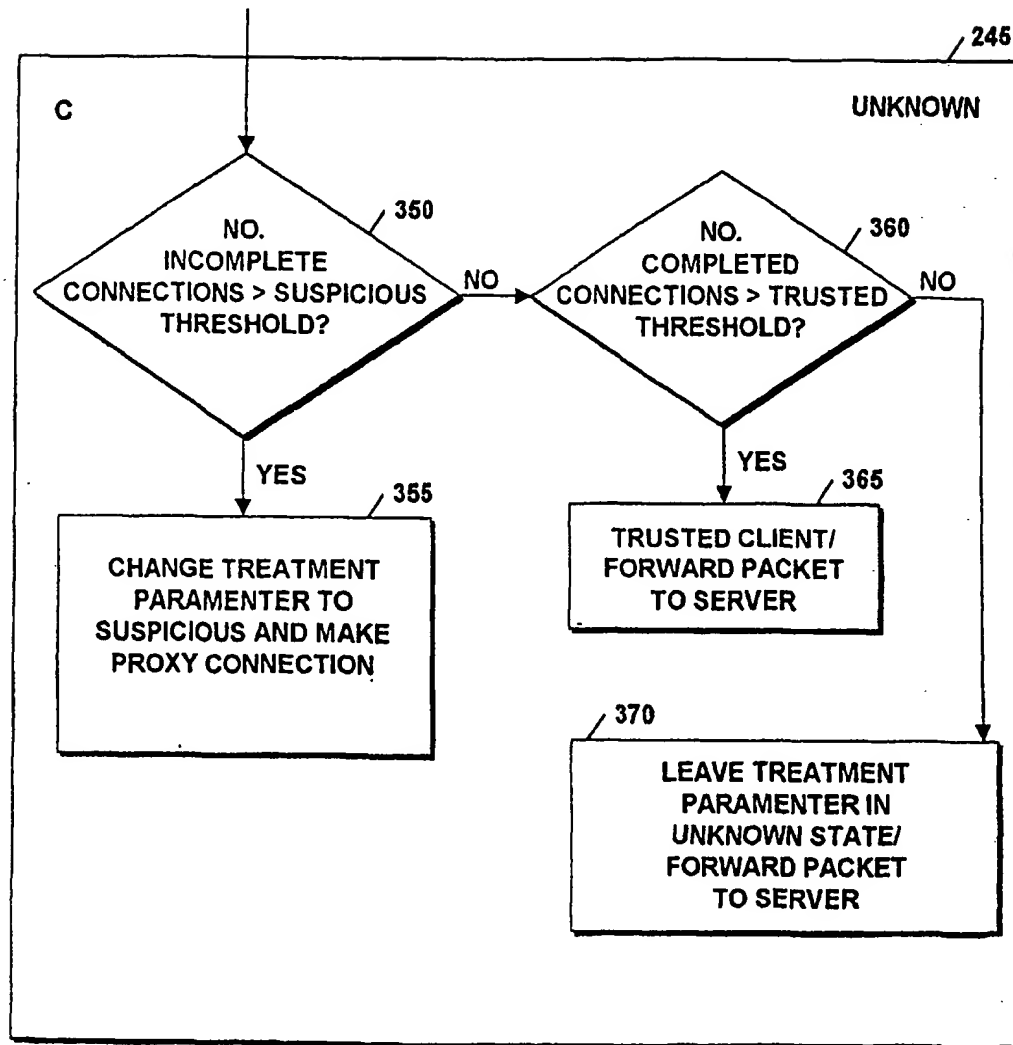


Figure 7

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
7 March 2002 (07.03.2002)

PCT

(10) International Publication Number  
WO 02/19661 A3

(51) International Patent Classification<sup>7</sup>: H04L 29/06,  
12/56

(21) International Application Number: PCT/US01/41961

(22) International Filing Date: 30 August 2001 (30.08.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/653,045 1 September 2000 (01.09.2000) US

(71) Applicant: TOP LAYER NETWORKS, INC. [US/US];  
2400 Computer Drive, Westboro, MA 01581-1770 (US).

(72) Inventors: NARAYANASWAMY, Krishna; c/o Top  
Layer Networks, Inc., 2400 Computer Drive, Westboro,  
MA 01581-1770 (US). SPINNEY, Barry, A.; c/o Top  
Layer Networks, Inc., 2400 Computer Drive, Westboro,  
MA 01581-1770 (US). ROSS, Theodore, L.; c/o Top

Layer Networks, Inc., 2400 Computer Drive, Westboro,  
MA 01581-1770 (US). PAQUETTE, Michael, D.; Top  
Layer Networks, Inc., 2400 Computer Drive, Westboro,  
MA 01581-1770 (US). WRIGHT, Christopher, L.; Top  
Layer Networks, Inc., 2400 Computer Drive, Westboro,  
MA 01581-1770 (US).


(74) Agents: CHOW, Stephen, Y. et al.; Perkins, Smith & Co-  
hen, LLP, One Beacon Street, Boston, MA 02108 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI,  
SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA,  
ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian

[Continued on next page]

(54) Title: SYSTEM AND PROCESS FOR DEFENDING AGAINST DENIAL OF SERVICE ATTACKS ON NETWORK NODES

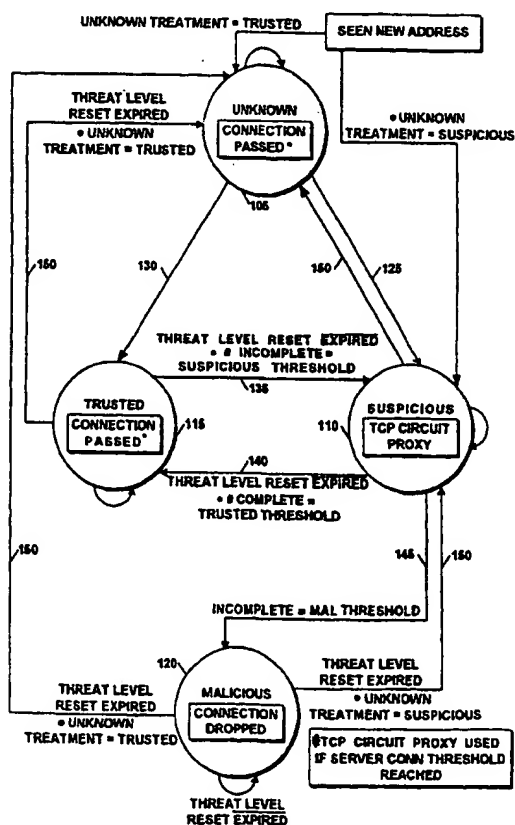

(57) Abstract: The present invention is a network switch that maintains a relatively lightly loaded state, and at the same time protects the network servers from DOS and DDOS attacks. The switch maintains a very large table of IP addresses where it stores information such as the number of incompleted and completed connections from each address. Using this information, the switch classifies each address into a threat level: unknown, trusted, suspicious, and malicious. Each threat level is treated differently allowing the switch to provide efficient access to the server while maintaining security. Connection to the server is denied to clients classified as malicious while trusted clients are passed through to the server. Suspicious connections are proxied while unknown connection treatment may be set by the user.



patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:  
18 April 2002

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

# INTERNATIONAL SEARCH REPORT

ii. National Application No

PCT/US 01/41961

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H04L29/06 H04L12/56

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 48303 A (CISCO TECH IND) 23 September 1999 (1999-09-23) abstract; figures 4,2	1,3,6, 8-10
A	page 2, line 31 -page 3, line 22 page 7, line 21 -page 9, line 17 ---	2,4,5
X	SCHUBA C L ET AL: "Analysis of a denial of service attack on TCP" SECURITY AND PRIVACY, 1997. PROCEEDINGS., 1997 IEEE SYMPOSIUM ON OAKLAND, CA, USA 4-7 MAY 1997, LOS ALAMITOS, CA, USA, IEEE COMPUT. SOC, US, 4 May 1997 (1997-05-04), pages 208-223, XP010230160 ISBN: 0-8186-7828-3 abstract paragraphs '0004!', '0005! --- -/--	6-9

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

13 February 2002

Date of mailing of the international search report

19/02/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Figiel, B



# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 01/41961

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 958 053 A (DENKER JOHN STEWART)  28 September 1999 (1999-09-28)  abstract; figure 7  column 5, line 9 - line 42  column 14, line 25 - line 42  column 15, line 35 - line 65  -----</p>	1,3

# INTERNATIONAL SEARCH REPORT

Information on patent family members

I. national Application No

PCT/US 01/41961

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
WO 9948303	A	23-09-1999	AU	3098299 A	11-10-1999
			WO	9948303 A2	23-09-1999
US 5958053	A	28-09-1999	EP	0956685 A1	17-11-1999
			WO	9834384 A1	06-08-1998